



Care and Cleaning Instructions

FGI-Industries Ltd.
906 Murray Rd
East Hanover, NJ 07936

Phone: 888.528.4151

Wood Cabinet Surfaces and Finishes:

As with all real wood products please avoid excessive moisture. Covered Bridge Cabinetry is designed for use inside the home and is not intended for outdoor use. After installation of your cabinets, wipe down all exteriors with a clean damp cloth to remove dust. Complete a small area at a time and wipe dry. Wood cabinetry finishes can be cleaned and protected by using most commercially available cleaning polishes. Covered Bridge Cabinetry recommends an emulsion-type cleaner like Murphy's Oil Soap. They are formulated without wax, petroleum solvents or silicones. The extended and/or continuous use of wax polishes can result in a wax film buildup, while the use of silicone polishes can harm the cabinet's finish.

Cleaning Agents:

It is recommended that spray type polishes that contain petroleum solvents are avoided as they are flammable and toxic if swallowed. Use a damp cloth to clean normal household spills. After cleaning thoroughly, dry the surface preferably with a lint-free cotton cloth. For difficult stains, it may be necessary to use a mild detergent with warm water. Always wipe the surface dry immediately. Never use abrasive cleaners, scouring pads or powdered cleansers to clean your wood cabinetry. It is strongly recommended that you do not allow oven cleaner to touch any part of the cabinet.

NOTE: Do not use a dish cloth to wipe your cabinet exterior, it may contain remnants of grease, detergents or abrasive residues that can damage the surface.

Everyday Care:

Avoid draping damp or wet dish towels over the door of the sink base cabinet. Over time, this moisture can cause permanent water damage to the door. It is important to wipe up spills and water marks as they occur. Give special attention to areas around the sink and dishwasher.

Care and Cleaning of Hardware:

Periodically, use mild soap and warm water to clean door/drawer knobs or pulls. Thoroughly dry all hardware joints and surfaces and the surrounding area with a clean, soft cloth. Buff hardware with a clean, dry cloth. Lubricating hinges is not necessary. Hinges can be cleaned or dusted using cotton-tipped swabs.

CAUTION: Most brass and silver polishes contain various harsh chemicals that can damage the hardware's surface. These polishes and cleaners are NOT recommended.

Avoid Excessive Heat:

Self-cleaning appliances generate intense heat during a cleaning cycle. Since the integrity of the appliance seal or gasket may be compromised during installation or with age, Covered Bridge Cabinetry recommends the removal of doors and/or drawers from cabinets adjacent to or directly above an appliance during a cleaning cycle. This will help prevent possible damage to the finish or surface of these cabinets. Purchasing a "heat shield" that may be installed on the side panels of an oven cabinet to help deflect excessive heat from adjacent cabinets.



Care and Cleaning Instructions

FGI-Industries Ltd.
906 Murray Rd
East Hanover, NJ 07936

Phone: 888.528.4151

Care and Cleaning of Glass Door Inserts:


If your kitchen contains cabinetry accented with glass doors apply glass cleaner to a towel, not directly to the glass.

Care and Cleaning of Mirrors:


Cleaner should always be applied to a cloth, not directly to the mirror, and should not be allowed to run or drip into the bottom trim. Avoid cleaners that contain sodium hydrochloride, phosphoric acid or sulfur (found in products to prevent mildew and fungus). Hair spray and other hair care products often contain chemicals that are caustic to silver and may cause damage to the mirror back. Do not use abrasives.

How to Adjust Blum Hinges & Drawer Glides


Click videos to watch

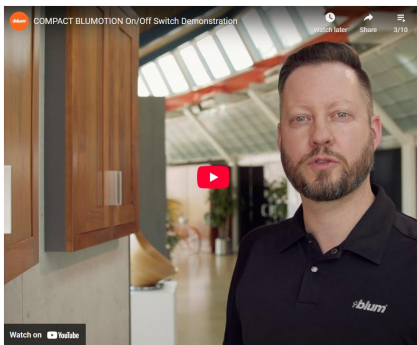


Compact Blumotion On/Off Switch Demo

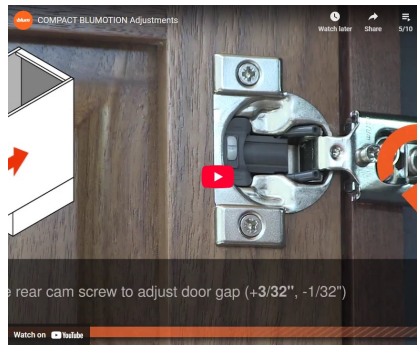


Compact Blumotion Adjustments

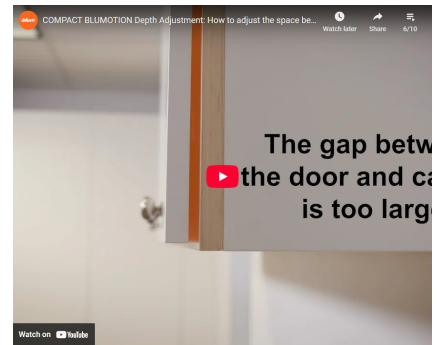

Compact Blumotion Depth Adjustment

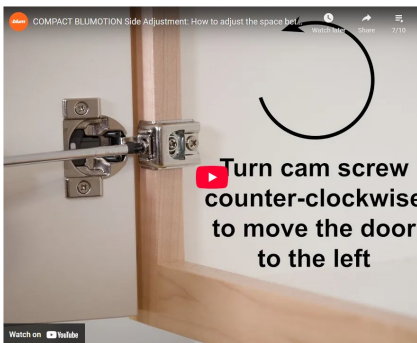

Compact Blumotion Side Adjustment

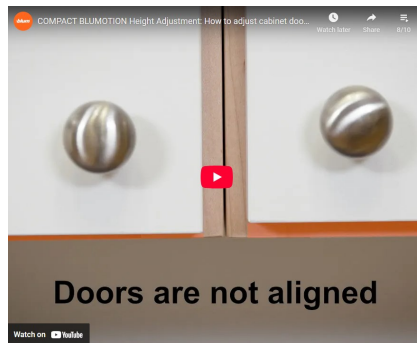

Compact Blumotion Height Adjustment



Tandem Drawer Glide Installation